


TECHNICAL INFORMATION 11-2010

TF34 system

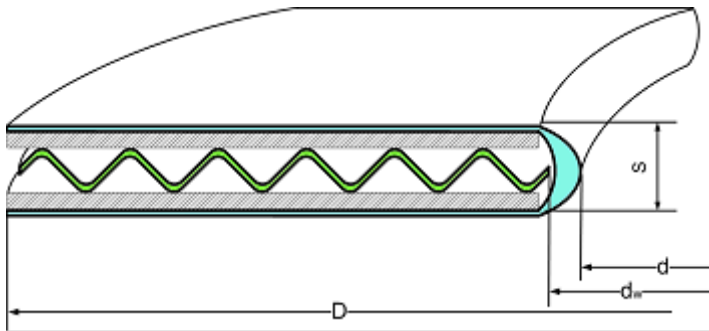

TF34 system is a composite of PTFE envelope and different soft insert. The sealing insert is made of corrugated stainless steel, soft non-asbestos material and then coated with PTFE envelope.

Different combinations of soft sealing inserts are available for special applications. The most common and effective soft sealing insert used is Doniflex, although other materials (like Graphite) are also available for special applications.

Every TF34 system is pinhole free - tested with spark tester; Ta-Luft (VDI 2440) approved; FDA.

*All information data are based on years of experience in production and operation of sealing elements. However, in view of the wide variety of possible installation and operating conditions one cannot draw final conclusions in all application cases regarding the behavior in gasket joint. The data may not, therefore, be used to support any warranty claims.
Whenever there is any doubt, our staff will be pleased to assist you in finding the optimum sealing solutions.*

CONFIDENTIALITY NOTICE

This page and any and all accompanying documents contain confidential information intended for a specific individual and purpose. This telecopied information is private and protected by law. If you are not the intended recipient, you are hereby notified that any disclosure, copying or distribution, or the taking of any action based on the contents of this information is strictly prohibited.